

General ARXG45KMLA elektrisk tilkoblingsskjema

Type inne-del ARXG45KMLA Driftstrøm (Max) :...18,6A...(28,5A).....
Type ute-del AOHG45KBTB Anbefalt sikring:.....C32A.....




Utedel



Innedel

1 og 2/N er 230 v tilførsel
3 er signalkabel

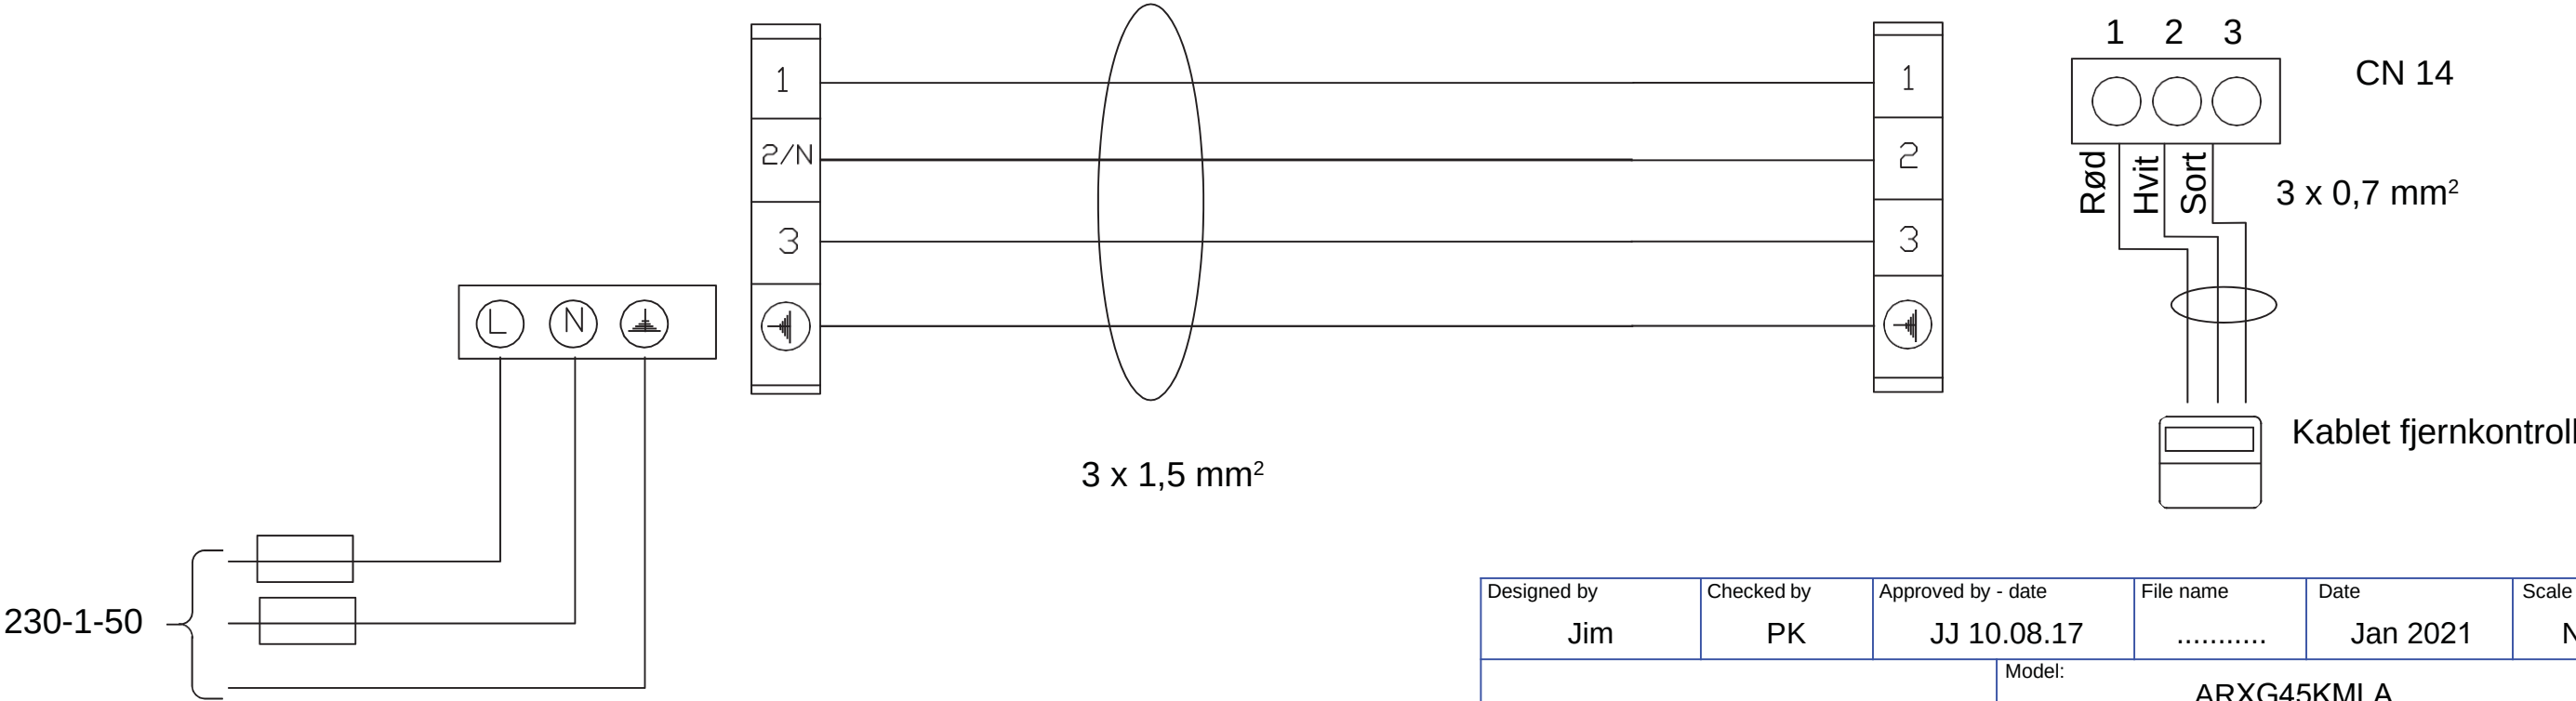

230-1-50

Designed by	Checked by	Approved by - date	File name	Date	Scale
Jim	PK	JJ 10.08.17		Jan 2021	NA
			Model: ARXG45KMLA		
			Pingvin Klima AS	Edition	Sheet 1/1